

HELPFUL TIPS & Advice For Your COLORED WOOD MULCH

INSTALL COLORED WOOD MULCH 24-48 HRS BEFORE RAIN AND/OR WATERING



WASH OFF MAY OCCUR IF THE MULCH DOESN'T <u>COMPLETELY</u> <u>DRY</u> BEFORE RAIN/WATERING



Do NOT STORE COLORED WOOD MULCH ON **CONCRETE** OR ANY SURFACE SUSCEPTIBLE TO **STAINING** \rightarrow \rightarrow \rightarrow





THE COLORANT IN THE DYED MULCH CAN BLEED AND STAIN SURFACES. USE GLOVES TO PROTECT YOUR HANDS & TARPS TO PROTECT YOUR SURFACES FROM STAINING.


MADE TO BE COLOR FAST FOR THE SEASON!

HELPFUL TIPS & ADVICE FOR MULCHING




AFTER THE GROUND HAS THAWED, APPLY THE MULCH 2 - 3 INCHES THICK. A SECOND MULCH APPLICATION WILL FURTHER INSULATE AND PROTECT PLANTS THROUGH THE WINTER.

FALL:

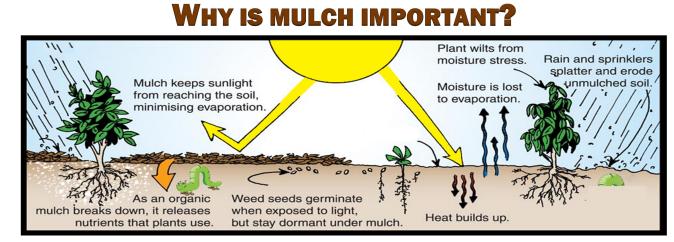

MULCHING AROUND YOUR TREE

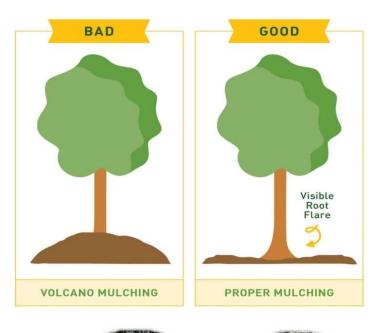

DID YOU KNOW...

MOLD CAN GROW ON MULCH IN CERTAIN CONDITIONS? DON'T WORRY! EVEN THOUGH IT ISN'T PRETTY TO LOOK AT, THE MOLD IS SAFE FOR YOUR PLANTS, EASY TO PREVENT, AND EASY TO REMOVE. MOLD BLOOMS THRIVE ON MOISTURE. TO PREVENT MOLD BLOOMS, FLUFF THE MULCH MONTHLY (OR MORE DURING PERIODS OF HIGH PRECIPITATION) TO DISRUPT THE BLOOMING PROCESS. THIS WILL ENCOURAGE AIR FLOW AND KEEP THE MULCH FROM MATTING TOGETHER. TO REMOVE THE MOLD, USE A RAKE OR GLOVES AND DISPOSE OF THE MULCH AWAY FROM YOUR YARD.







